

MIP805

Silicon MOS IC

■ Features

- Output MOSFET with high breakdown voltage for voltage step-up, EL driver and CMOS control circuits are integrated into one chip.
- Oscillation circuit is incorporated
- EL voltage controlled push-pull drive system achieves higher EL light intensity. (160V_{p-p})



■ Applications

- EL drive

■ Absolute Maximum Ratings (Ta = 25°C)

Parameter	Symbol	Ratings	Unit
Power supply voltage	V _{CC}	-0.5 to 6	V
Input voltage (ENB)	V _{ENB}	-0.5 to V _{CC} + 0.5	V
Output voltage (CIL)	V _{CIL}	-0.5 to 100	V
Output voltage (DC)	V _{DC}	-0.5 to 100	V
Output voltage (EL)	V _{EL}	-0.5 to 100	V
Output voltage (EL̄)	V _{EL̄}	-0.5 to 100	V
Output current (CIL)	I _{CIL}	80	mA
Output current (EL)	I _{EL}	20	mA
Output current (EL̄)	I _{EL̄}	20	mA
Allowable power dissipation	P _D	150	mW
Operating ambient temperature	T _{opr}	-20 to +70	°C
Operating Junction temperature	T _{ch}	-20 to +125	°C
Storage temperature	T _{stg}	-55 to +125	°C

■ Block Diagram

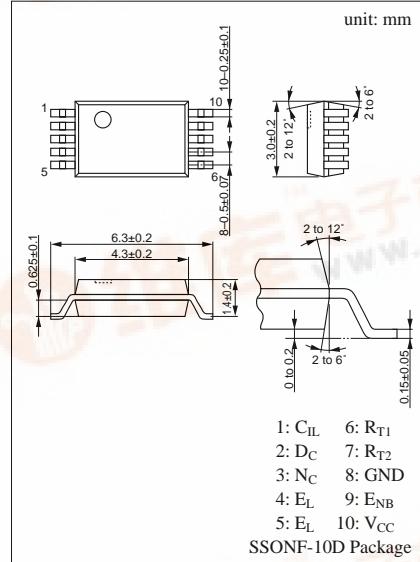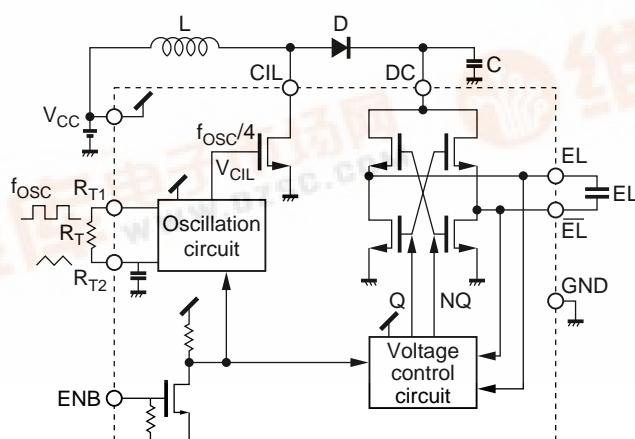

1: C_{IL} 6: R_{T1}
2: D_C 7: R_{T2}
3: N_C 8: GND
4: E_L 9: E_{NB}
5: E_{L̄} 10: V_{CC}
SSONF-10D Package

■ Electrical Characteristics ($T_a = 25 \pm 2^\circ\text{C}$)

Parameter	Symbol	Conditions*	min	typ	max	Unit
Operating condition						
Supply voltage	V_{CC}		2.5	3	3.5	V
Input voltage (High) (ENB)	V_{IH}	$V_{CC} = 2.5$ to 3.5V	1			V
Input voltage (Low) (ENB)	V_{IL}	$V_{CC} = 2.5$ to 3.5V	0		0.3	V
Oscillation circuit						
Oscillator output frequency (R_{T1})	f_{OSC}	$R_T = 270\text{k}\Omega$	98	116	134	kHz
Inductor frequency (CIL)	f_{COIL}	$R_T = 270\text{k}\Omega$	24.5	29	33.5	kHz
Inductor duty cycle (CIL)	DUTY		70	75	80	%
Output						
Inductor output (CIL)	Output breakdown voltage	V_{DSS}	$E_{NB} = 0$, $I_{DS} = 100\mu\text{A}$	100		V
	Output current	I_{DSS}	$V_{DS} = 20\text{V}$	70		mA
	ON-state resistance	R_{on}	$I_D = 10\text{mA}$		10	Ω
	OFF-leakage current	$I_{DSS(off)}$	$E_{NB} = 0$, $V_{DS} = 80\text{V}$		10	μA
EL output (EL)	Output current	I_{DSS}	$V_{DS} = 20\text{V}$	10		mA
	OFF-leakage current	$I_{DSS(off)}$	$E_{NB} = 0$, $V_{DS} = 80\text{V}$		10	μA
EL output (\bar{EL})	Output current	I_{DSS}	$V_{DS} = 20\text{V}$	10		mA
	OFF-leakage current	$I_{DSS(off)}$	$E_{NB} = 0$, $V_{DS} = 80\text{V}$		10	μA
EL output voltage control						
EL output voltage	V_{EL}		148	160	180	$\text{V}_{\text{P-P}}$
Consumption current						
Quiescent circuit current	I_{COFF}	$V_{CC} = 3.5\text{V}$, $V_{ENB} = 0$, $R_T = 270\text{k}\Omega$			0.1	μA
Circuit current	I_C	$V_{CC} = V_{ENB} = 3.5\text{V}$, $R_T = 270\text{k}\Omega$		0.5	10	μA

* $V_{CC} = 3\text{V}$, $ENB = 3\text{V}$, and $GND = 0$ unless otherwise specified

■ Timing Chart

