

A_D-2W & B_D-2W Series

2W, FIXED INPUT, ISOLATED & UNREGULATED DUAL/SINGLE OUTPUT DC-DC CONVERTER



FEATURES

- High Efficiency up to 86%
- 1KVDC Isolation
- DIP Package
- Internal SMD Construction
- Temperature Range: -40°C to +85°C
- No Heat sink Required
- Internal SMD construction
- Industry Standard Pinout
- RoHS Compliance

APPLICATIONS

The A_D-2W & B_D-2W Series are specially designed for applications where a group of polar power supplies are isolated from the input power supply in a distributed power supply system on a circuit board.


These products apply to:

- Where the voltage of the input power supply is fixed (voltage variation $\leq \pm 10\%$);
- Where isolation is necessary between input and output (isolation voltage $\leq 1000\text{VDC}$);
- Where the regulation of the output voltage and the output ripple noise are not demanding.

Such as: purely digital circuits, ordinary low frequency analog circuits, and IGBT power device driving circuits.

MODEL SELECTION

A0505D-2W

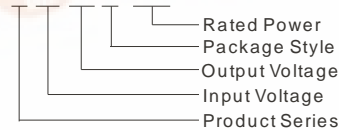

MORNSUN Science & Technology co., Ltd.

Address: 2th floor 6th building, Hangzhou Industrial District, Guangzhou, China
 Tel: 86-20-38601850
 Fax: 86-20-38601272
<http://www.mornsun-power.com>

PRODUCT PROGRAM

Part Number	Input		Output			Efficiency (% Typ)	Certificate
	Voltage (VDC)		Voltage (VDC)	Current (mA)			
	Nominal	Range		Max	Min		
B0303D-2W	3.3	3.0-3.6	3.3	400	40	73	
A0505D-2W	5	4.5-5.5	± 5	± 200	± 20	82	UL
A0509D-2W			± 9	± 111	± 12	85	UL
A0512D-2W			± 12	± 83	± 9	86	UL
A0515D-2W			± 15	± 67	± 7	82	UL
B0503D-2W			3.3	400	40	74	
B0505D-2W	5	400	40	81	UL CE		
B0509D-2W	9	222	23	84	UL CE		
B0512D-2W	12	167	17	83	UL CE		
B0515D-2W	15	133	14	84	UL CE		
A1205D-2W	12	10.8-13.2	± 5	± 200	± 20	81	UL
A1209D-2W			± 9	± 111	± 12	84	UL
A1212D-2W			± 12	± 83	± 9	86	UL
A1215D-2W			± 15	± 67	± 7	82	UL
B1205D-2W			5	400	40	81	UL CE
B1209D-2W	9	222	23	82	UL CE		
B1212D-2W	12	167	17	85	UL CE		
B1215D-2W	15	133	14	82	UL CE		
A1505D-2W	15	13.5-16.5	± 5	± 200	± 20	80	
A2405D-2W			± 5	± 200	± 20	80	UL
A2409D-2W			± 9	± 111	± 12	84	UL
A2412D-2W			± 12	± 83	± 9	84	UL
A2415D-2W			± 15	± 67	± 7	84	UL
A2424D-2W	± 24	± 42	± 5	85			
B2405D-2W	24	21.6-26.4	5	400	40	80	UL CE
B2409D-2W			9	222	23	83	UL CE
B2412D-2W			12	167	17	84	UL CE
B2415D-2W			15	133	14	84	UL CE
B2424D-2W			24	84	10	84	

Note: The A_S_1W/B_LS_1W series also are available in our company.

COMMON SPECIFICATIONS

Item	Test conditions	Min	Typ	Max	Units
Operating Temp. Range		-40		85	°C
Storage Temp. Range		-55		125	
Storage humidity range				95	%
Cooling		Free air convection			
Temp. rise at full load			15	25	°C
Lead temperature	1.5mm from case for 10 seconds			300	
Isolation voltage	Tested for 1 minute and 1 mA max	1000			VDC
Isolation resistance	Test at 500VDC	1000			MΩ
Short circuit protection*				1	s
Case material		Plastic (UL94-V0)			
MTBF		3500			K hours

*Supply voltage must be discontinued at the end of short circuit duration.



OUTPUT SPECIFICATIONS


Test conditions		Min	Typ	Max	Units
Output power		0.2		2	W
Line regulation	For Vin change of 1%			±1.2	%
Load regulation	10% to 100% load	(5V output)	12.8	15	%
		(9V output)	8.3	15	
		(12V output)	6.8	15	
		(15V output)	6.3	15	
Output voltage accuracy	See tolerance envelope graph				
Temperature drift	100% full load			0.03	%/°C
Ripple & Noise*	20MHz Bandwidth		100	150	mVp-p
Switching frequency	Full load, nominal input		75		KHz

*Test ripple and noise by "parallel cable" method. See detailed operation instructions at Testing of Power Converter section, application notes.


Note:

- All specifications measured at $T_A=25^\circ\text{C}$, humidity<75%, nominal input voltage and rated output load unless otherwise specified.
- Dual output models unbalanced load: $\pm 0.5\%$.

TYPICAL CHARACTERISTICS

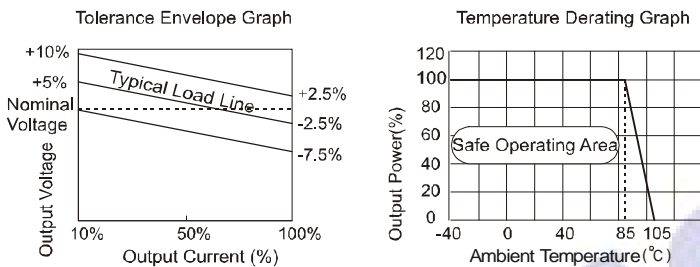

OUTLINE DIMENSIONS & PIN CONNECTIONS

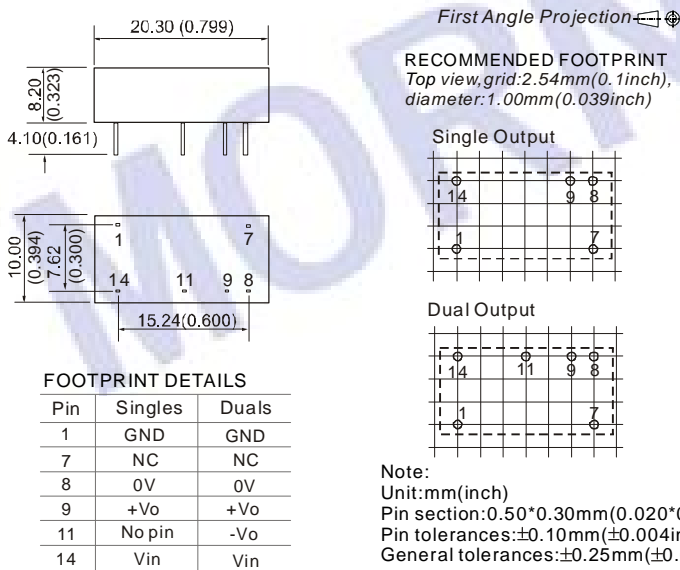

APPLICATION NOTE

Requirement on output load


To ensure this module can operate efficiently and reliably, During operation, the minimum output load is **not less than 10%** of the full load, and that **this product should never be operated under no load!** If the actual output power is very small, please connect a resistor with proper resistance at the output end in parallel to increase the load, or use our company's products with a lower rated output power (A_D -1W/B_D-1Wseries).

Overload Protection

Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or add a circuit breaker to the circuit.

Recommended testing and application circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

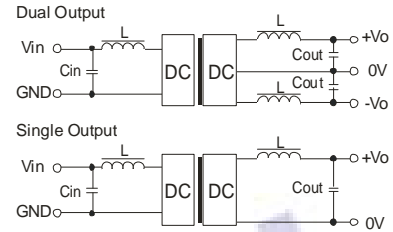

(Figure 1)

It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the DC/DC frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided the safe and reliable operation is ensured, the greatest capacitance of its filter capacitor sees (Table 1).


EXTERNAL CAPACITOR TABLE (TABLE 1)

Vin (VDC)	Cin (uF)	Single Vout (VDC)	Cout (uF)	Dual Vout (VDC)	Cout (uF)
5	4.7	3.3	10	±5	4.7
12	2.2	5	10	±9	2.2
15	2.2	9	4.7	±12	1
24	1	12	2.2	±15	0.47
-	-	15	1	±24	0.47

It's not recommended to connect any external capacitor in the application field with less than 0.5 watt output.

Output Voltage Regulation and Over-voltage Protection Circuit

The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator that is connected to the input or output end in series (Figure 2).

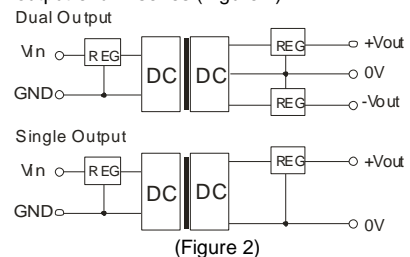

(Figure 2)

No parallel connection or plug and play.