


How To Order


Collision	390m/s ² , 4000cycles, ΔR ≤ 5%R
ΔR ≤ 5%R, Δ(Uab/Uac) ≤ 7.5%R	
Vibration	500Hz, 0.75mm, 6h, 10~
ΔR ≤ 5%R, Δ(Uab/Uac) ≤ 5%	
30min 5cycles	
Temperature Variation	55°C, 30min, +100°C
Coefficient	±250ppm/°C
Temperature	100°C
Temperature Range	-55°C ~ 100°C
Power Rating	0.25W@70°C, 0.0W@100°C
Environmental Characteristics	Power Rating, 315 volts max
Effective	Travel, 250°
Withstand Voltage	70Vac
Insulation Resistance	(500Vac) R1 ≥ 1GΩ
Contact Resistance Variation	CRV ≤ 3%或 5Ω
Absolute Minimum Resistance	10Ω
Tolerance	±10%或 ≤ 1%R
Standard Resistance Range	2MΩ ~ 50Ω

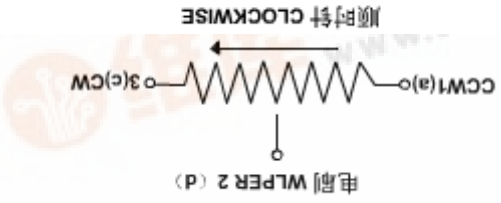


Special resistances available

Resistance Code	Resistance (ohms)	Resistance Code	Resistance (ohms)
100	10	200	20
500	50	500	500
101	100	501	1,000
201	200	102	2,000
501	500	202	5,000
102	1,000	502	10,000
202	2,000	103	20,000
502	5,000	203	25,000
103	10,000	503	50,000
203	20,000	104	100,000
503	25,000	204	200,000
104	50,000	504	500,000
204	100,000	105	1,000,000
504	200,000	205	2,000,000

Standard Resistance Table

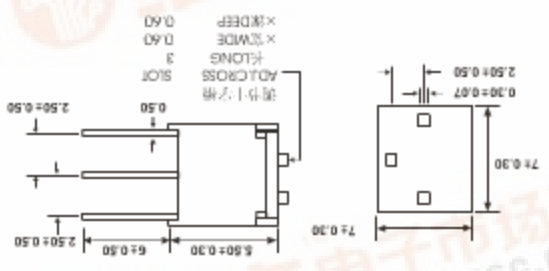

Mutual dimension

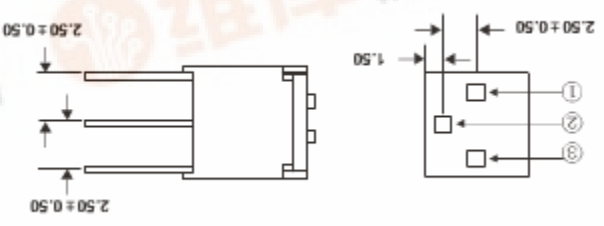

7x7 Square/ Single Turn /Trimming Potentiometer

-- 3323P --

